

Precision pressure sensor

Basic version

Model CPT6020



WIKA data sheet CT 25.13

Applications

- Calibration technology
- High-accuracy pressure monitoring
- Pressure sensing in critical applications
- Aerospace

Special features

- Accuracy: 0.020 % FS
- Measuring range: 25 mbar ... 1,001 bar
[10 inH₂O ... 15,015 psi]
- Temperature compensation: -20 ... +75 °C [-4 ... +167 °F]
- RS-232 or RS-485 communication
- Compact rugged design



Precision pressure sensor, model CPT6020

Description

The CPT6020 precision pressure sensor is a pressure sensing instrument that provides high-accuracy pressure measurements. This sensor used a low-hysteresis silicon sensor with electronically compensated pressure linearity over the compensated temperature range.

The CPT6020 is characterised over the full pressure and temperature range to achieve 0.020 % FS accuracy. This specification includes linearity, hysteresis, repeatability and temperature errors.

Application

The model CPT6020 precision pressure sensor is ideal for OEM instruments that require high accuracy in pressure measurement. Examples are:

- Flow calibrators, humidity calibrators, pressure controllers
- For aerospace wind tunnel calibration and also for the automotive sensor testing
- In the aviation and space industries in general, hydrology and oceanography

Or also for applications where high-accuracy pressure measurements and long-term calibration stability are required.

Functions

The model CPT6020 has an RS-232 or RS-485 interface. The RS-485 interface offers multi-drop capability and simple cabling that includes power and communications. Four different baud rates can be selected and the sensor can be located up to 1,220 m [4,000 ft] from the host. System designers appreciate these high accuracy remotely accessible sensors that are not tied to a panel.

Each sensor can be configured for gauge or absolute pressure types. With a recalibration interval of 185 days and a high resolution of 8 significant digits, the CPT6020 is flexible enough to be used in a wide variety of applications.

Design

The 316L stainless steel construction and IP67 rating are an asset when utilising in corrosive or wet environments. Its compact design offers an advantage in miniaturisation of product design in many OEM applications.

The pressure connection and case can be customised to fit your application. Standard fittings are easily changed using the AN-4 female connection or the Autoclave® F250C connection.

Specifications Model CPT6020

Precision pressure sensor technology	
Accuracy ¹⁾	0.020 % FS
Measuring ranges	
Gauge pressure	0 ... 25 mbar to 0 ... 100 bar 0 ... 0.36 to 0 ... 1,500 psi
Bi-directional ²⁾	-12.5 ... +12.5 mbar to -1 ... 100 bar -0.18 ... +0.18 to -15 ... 1,500 psi
Absolute pressure	0 ... 350 mbar abs. to 0 ... 1,001 bar abs. 0 ... 5 psi abs. to 0 ... 15,015 psi abs.
Calibration interval	185 days
Optional barometric reference	
Measuring range	552 ... 1,172 mbar abs. [8 ... 17 psi abs.]
Accuracy ¹⁾	0.020 % of reading
Pressure units	39 and 1 user-defined

1) It is defined by the total measurement uncertainty, which is expressed with the coverage factor ($k = 2$) and includes the following factors: the intrinsic performance of the instrument, the measurement uncertainty of the reference instrument, long-term stability, influence of ambient conditions, drift and temperature effects over the compensated range during a periodic zero point correction every 30 days.

2) The negative portion of a bi-directional range has the same accuracy as the equivalent positive range.

Precision pressure sensor	
Case	
Orientation effects	Negligible – completely removable with a zero point correction
Case material	316L stainless steel
Dimensions	see technical drawings
Weight	approx. 250 g [0.55 lbs] (depending on range)
Connections	
Pressure connections	FSAE J514/JIC or Autoclave® F250C (for pressure ranges > 400 bar [> 6,000 psi])
Overpressure safety	2x proof, 3x burst, static pressure < 3.45 bar [< 50 psi]
Wetted parts	Silicon, 316 stainless steel, glass filled resins, epoxy for pressure ranges ≤ 350 mbar [≤ 5 psi] 316 stainless steel for pressure ranges > 350 mbar ... 100 bar [> 5 ... 1,500 psi] 316 stainless steel, fluorocarbon rubber for pressure ranges > 100 bar [> 1,500 psi]
Permissible media	Clean, dry, non-corrosive gases for pressure ranges ≤ 350 mbar [≤ 5 psi] Media compatible with the listed wetted parts for pressure ranges > 350 mbar [> 5 psi]
Ingress protection	IP67
Display	
Resolution	100 ppb or better
Warm-up time	approx. 15 min. up to the specified accuracy

Precision pressure sensor	
Internal volume	
Measure port	< 1 ml
Reference port	< 40 ml
Voltage supply	
Power supply	DC 9 ... 18 V (DC 12 V nominal)
Current supply	< 26 mA at DC 12 V ±5 %
Permissible ambient conditions	
Compensated temperature range	-20 ... +75 °C [-4 ... +167 °F]
Operating temperature range	-40 ... +85 °C [-40 ... +185 °F]
Storage temperature range	-40 ... +85 °C [-40 ... +185 °F]
Humidity	0 ... 95 % r. h. (non-condensing)
Operating altitude	< 3,000 m or 10,000 ft
Communication	
Interface	RS-232 or RS-485 (multi-drop capability)
Baud rate	57,600 baud; default 9600, 19200 and 115200 user selectable
Measuring rate	50 values/s; default - (factory adjustable)

Approvals

Logo	Description	Country
	EU declaration of conformity <ul style="list-style-type: none"> ■ EMC directive ³⁾ EN 61326-1 emission (group 1, class A) and immunity (industrial application) ■ RoHS directive 	European Union

Certificates

Certificate	
Calibration ⁴⁾	Standard: A2LA calibration certificate (standard on factory) Option: DKD/DAkkS calibration certificate


3) **Warning!** This is class A equipment for emissions and is intended for use in industrial environments. In other environments, e.g. residential or commercial installations, it can interfere with other equipment under certain conditions. In such circumstances the operator is expected to take the appropriate measures.

4) Calibration in a vertical position.


Approvals and certificates, see website

Dimensions in mm [in]


Interface and reference port 1)

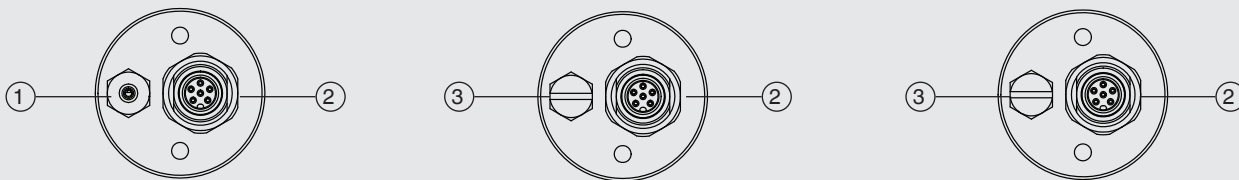


Case

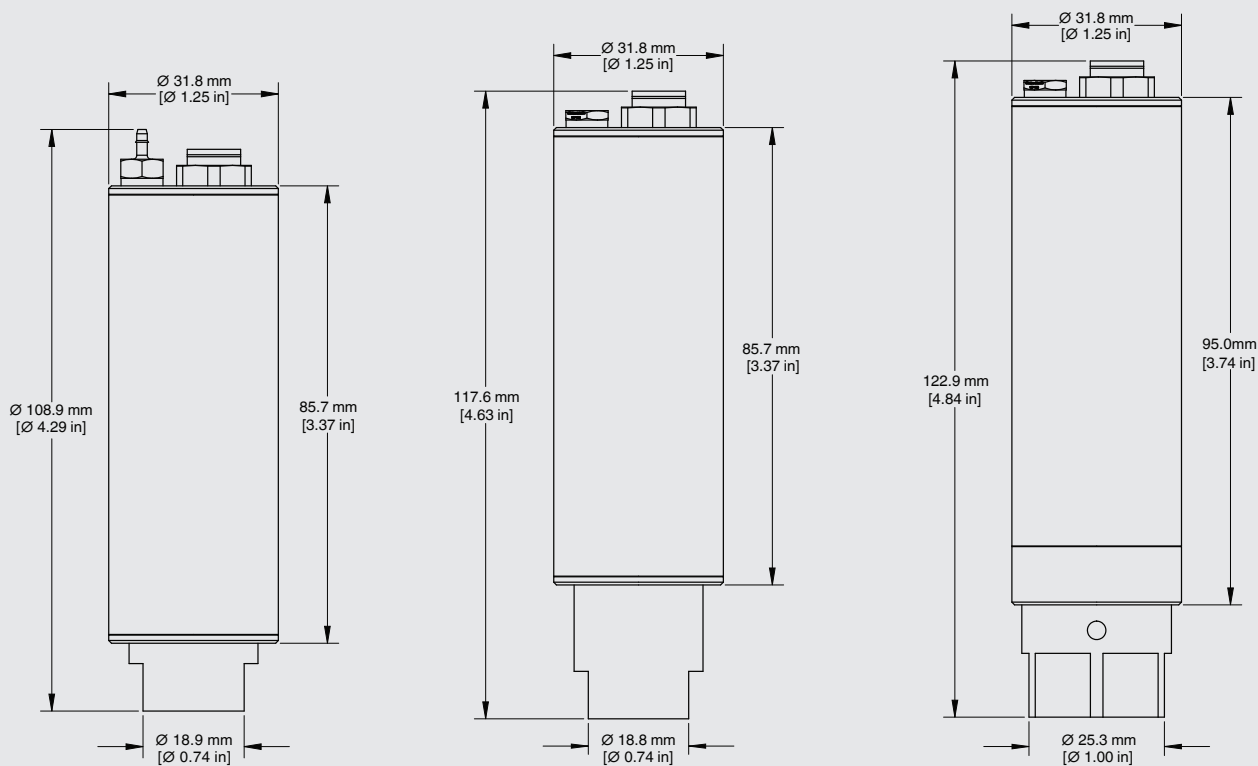


Pressure connection



$\leq 100 \text{ bar}$
 $[\leq 1,500 \text{ psi}]$



$100 \dots 400 \text{ bar}$
 $[1,500 \dots 6,000 \text{ psi}]$



$400 \dots 1,000 \text{ bar}$
 $[6,000 \dots 15,000 \text{ psi}]$

- ① Reference port for hose connection 1/16" barb
- ② 6-pin M8 connector
- ③ Seal screw

- ④ SAE J514 37° flare port 7/16-20 thread
- ⑤ Autoclave® F250 C female port

1) Reference port only for gauge pressure range; the port is plugged at absolute pressure range and sealed gauge ranges

Scope of delivery

- Precision pressure sensor model CPT6020
- Operating instructions
- Pressure adapter (as specified)
- 1.5 m [5 ft.] connection cable with flying leads
- A2LA calibration certificate (standard on factory)

Options

- DKD/DAkkS calibration certificate

Accessories

- Interface cable incl. voltage supply
- Pressure adapters

Ordering Information

CPT6020 / Instrument version / Pressure unit / Type of pressure / Start of measuring range / End of measuring range / Accuracy / Type of certificate / Mounting position / Interface / Baud rate / Output mode / Pressure adapter / Additional order information

© 12/2018 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.

